

STARLINK

HIGH PERFORMANCE
ACCESSORIES

Available to purchase after receiving your order confirmation email.

PIPE ADAPTER MOUNT

Designed to attach to any pole with a max diameter of 2.5" (64 mm). Slide adapter over the top of the existing pole, fasten provided screws, and drop Starlink in.

Tools Needed:

None

Package Dimensions:

21 x 14 x 8.7 cm / 8.3" x 5.5" x 3.4"


Package Weight:

0.6 kg / 1.35 lbs

Compatibility:

Standard Starlink

High Performance Starlink

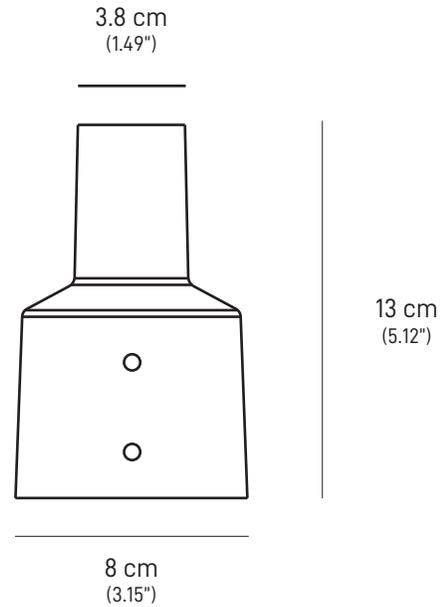

SHORT WALL MOUNT

Designed for installation on an exterior wall, near the top of the gable. Drilling required.

Tools Needed:

Drill, Stud / Electrical Finder, Socket Wrench, Level, 5/32" (4 mm) Drill Bit, 0.5" x 2.5" (12.5 mm x 63.5 mm) Socket, Pencil

Package Dimensions:


21 x 14 x 8.7 cm / 8.3" x 5.5" x 3.4"

Package Weight:

0.6 kg / 1.4 lbs

Compatibility:

Standard Starlink
High Performance Starlink

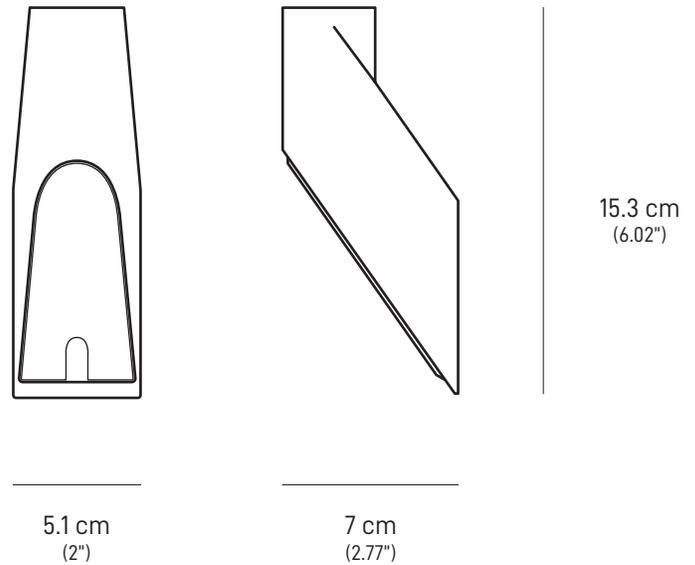

LONG WALL MOUNT

Designed for installation on an exterior wall near the top of the gable; extra length provides clearance of overhang when needed. Drilling required.

Tools Needed:

Drill, Stud / Electrical Finder, Socket Wrench, Level, 5/32" (4 mm) Drill Bit, 0.5" x 2.5" (12.5 mm x 63.5 mm) Socket, Pencil

Package Dimensions:


48.5 x 14 x 11.9 cm / 19.1" x 5.5" x 4.7"

Package Weight:

0.6 kg / 1.4 lbs

Compatibility:

Standard Starlink
High Performance Starlink

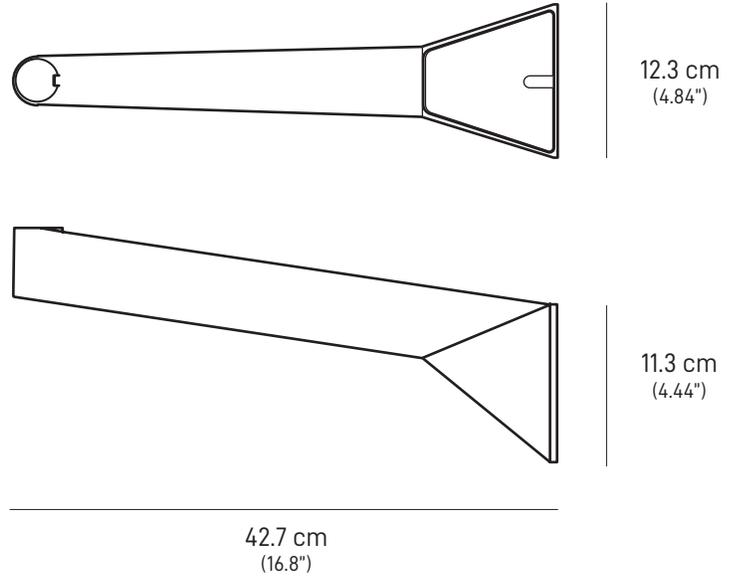

GROUND POLE MOUNT

Designed for in-ground installation when roof or wall mounting is not possible; requires digging.

Tools Needed:


Shovel, Mortar Hoe, Mixing Trough / Bucket, Gloves, Concrete Mix, and Water

Package Dimensions:


45.7" x 4.5" x 2.4" / 116 x 11.5 x 6.1 cm

Package Weight: 9.43 lbs / 4.27 kg

Compatibility: Rectangular Starlink

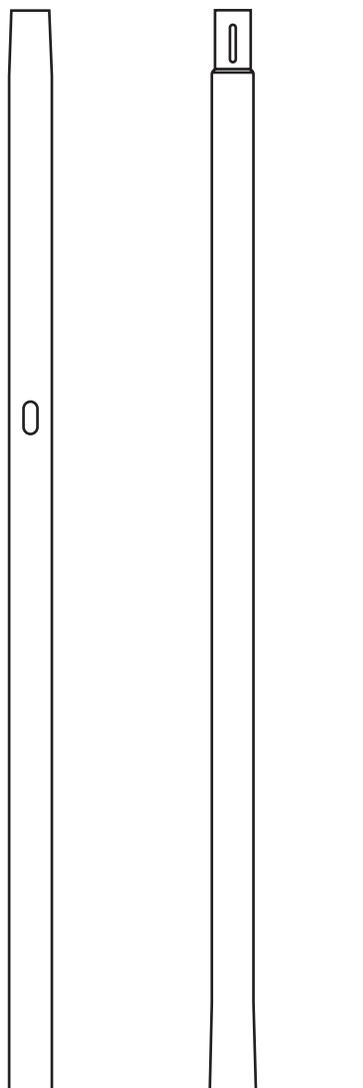

112.9 cm
(44.45 in)

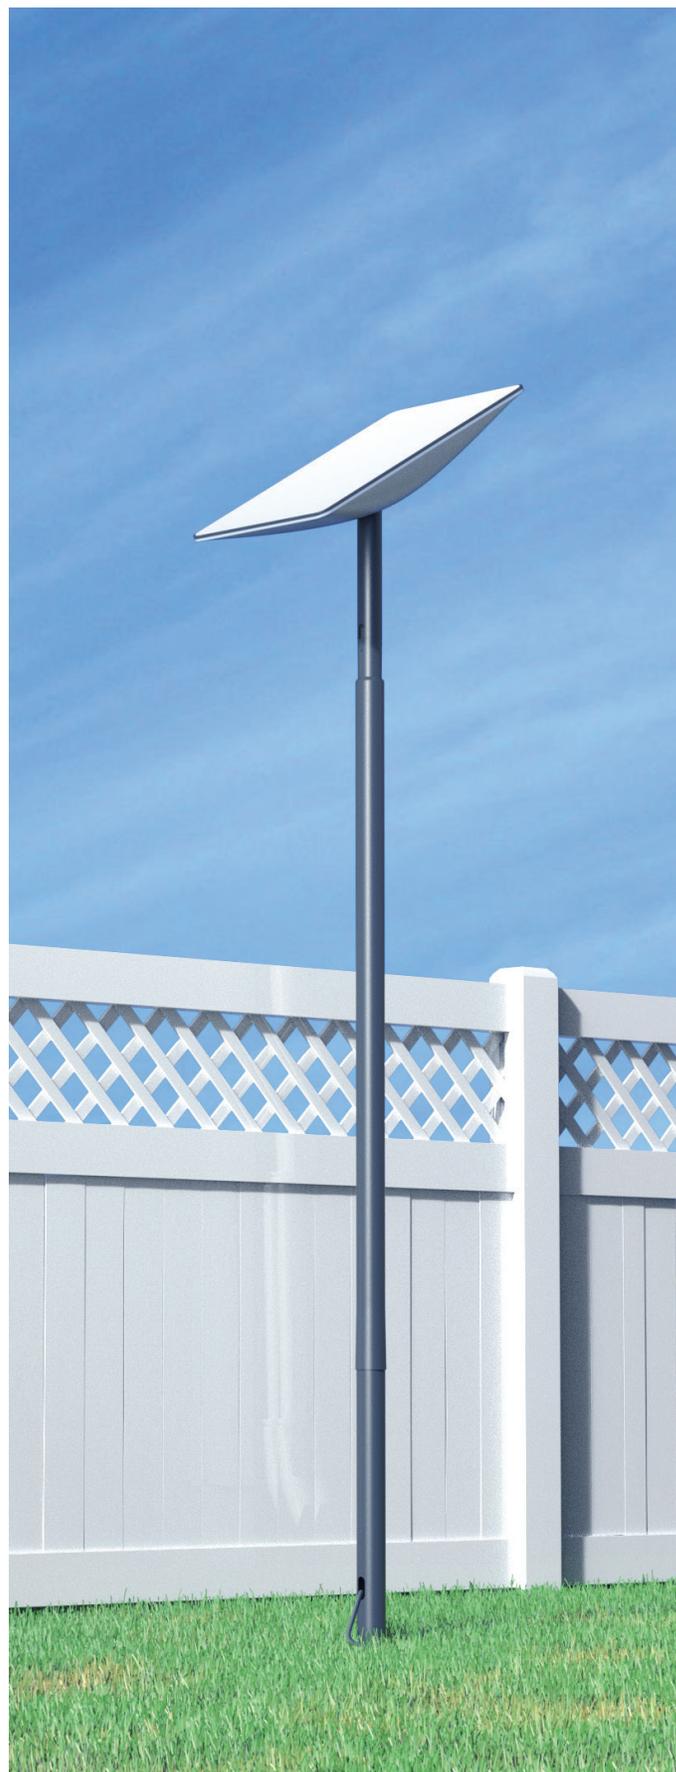

PIVOT MOUNT

Designed for installation on shingled roofs, recommend installing closer to edge for cable routing. Not recommended for tile, slate, and clay roofing.

For best results, Starlink should be installed as close to vertical as possible.

Tools Needed:


Drill, 5/32" (4 mm) Drill Bit, 1/2" (12.7 mm) Socket Wrench

Package Dimensions:


9.7" x 5.5" x 3.1" / 24.7 x 14 x 7.9 cm

Package Weight: 2.21 lbs / 1.0 kg

Compatibility: Rectangular Starlink

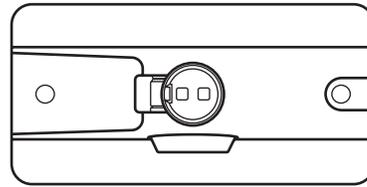

110mm
(4.3 in)

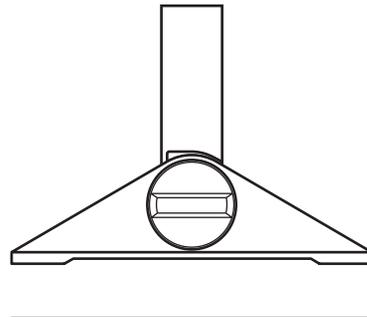

156mm
(6.14 in)

220mm
(8.66 in)



FLASHING MOUNT

Designed for installation on shingled roofs, recommend installing closer to edge for cable routing. Not recommended for tile, slate, and clay roofing.

For best results, Starlink should be installed as close to vertical as possible.

Tools Needed:


Drill, 5/32" (4 mm) Drill Bit, 1/2" (12.7 mm) Socket Wrench

Package Dimensions:


9.7" x 5.5" x 3.1" / 24.7 x 14 x 7.9 cm

Package Weight: 2.21 lbs / 1.0 kg

Compatibility: Rectangular Starlink

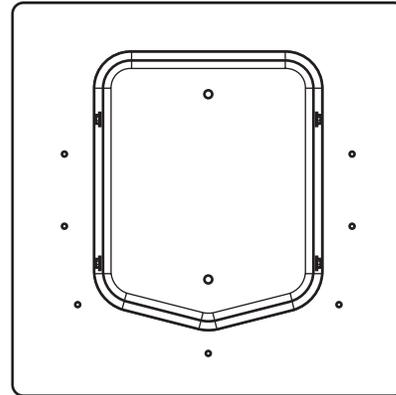

381mm
(15 in)



66.3mm
(2.61 in)

381 mm
(15 in)



RIDGELINE MOUNT

Designed for most rooftops (roof ridgelines) and any flat surface, no drilling required.

Ballast weight included with order and shipped separately.

Tools Needed:

None

Package Dimensions:

Mount Box: 74 x 61.4 x 9.5 cm / 29" x 24" x 3.7"

Ballast Box: 42.4 x 12.4 x 18.9 cm / 16.7" x 4.9" x 7.4"

Package Weight:



Mount Box: 5.3 kg / 11.7 lbs.

Ballast Box: 25.3 kg / 55.8 lbs.

Compatibility:

Standard Starlink

High Performance Starlink

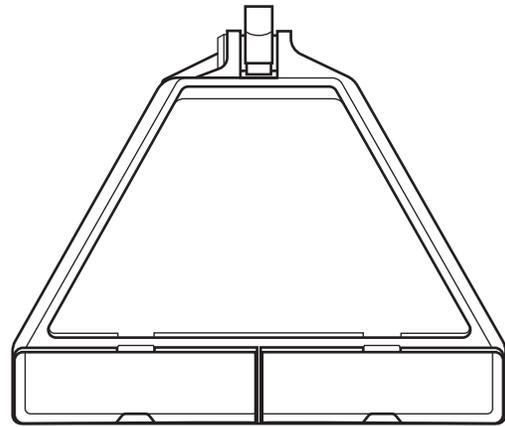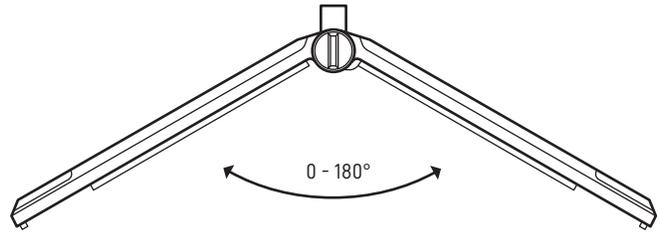

676 mm
(26.6in)



HIGH PERFORMANCE CABLES

30 m (98 ft) Router Cable is designed to replace the cable from the Starlink Kit when additional length is needed between the Power Supply and the Starlink Router.

Package Dimensions:


30 x 27 x 6.7 cm / 11.8" x 10.6" x 2.6"

Package Weight:

1.9 kg / 4.19 lbs

Compatibility:

High Performance Starlink
Flat High Performance Starlink

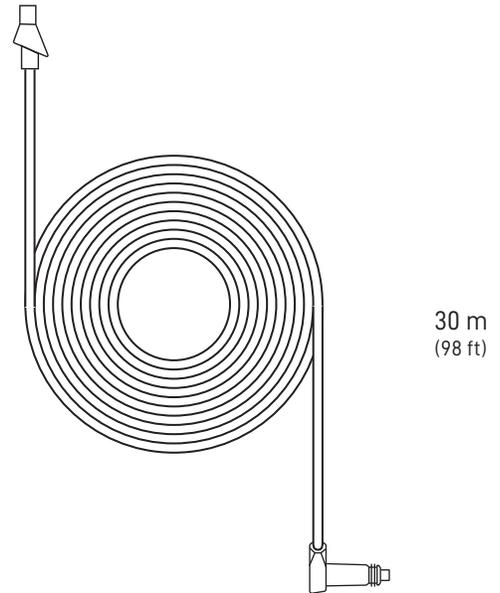

30 m (98 ft) Ethernet Cable is designed to replace the cable from the Starlink Kit when additional length is needed between the Power Supply and the RJ45 connector (for third party routers or devices).

Package Dimensions:


30 x 27 x 6.7 cm / 11.8" x 10.6" x 2.6"

Package Weight:

1.9 kg / 4.19 lbs

Compatibility:

High Performance Starlink
Flat High Performance Starlink

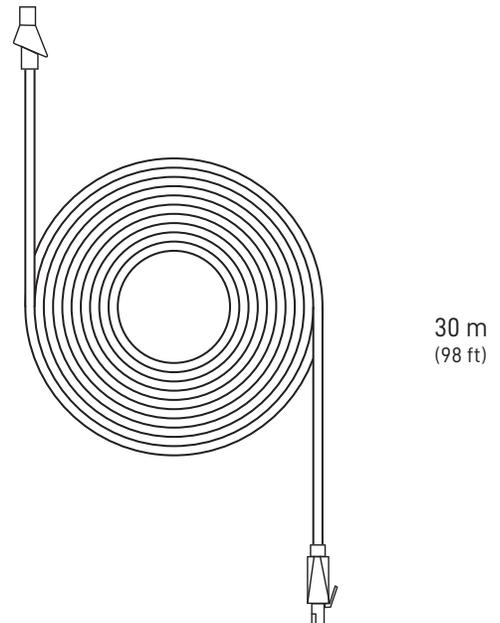

HIGH PERFORMANCE CABLES (CONT.)

25 m (82 ft) Starlink Cable is designed to replace the cable between the High Performance Starlink and the Power Supply in case of damage.

Package Dimensions:


22 x 51.6 x 6.4 cm / 8.7" x 20.3" x 2.5"

Package Weight:

2.9 kg / 6.39 lbs

Compatibility:

High Performance Starlink



25 m
(82 ft)

8 m (26.2 ft) Starlink Cable is designed to replace the cable between the High Performance Starlink and the Power Supply in case of damage.

Package Dimensions:

22 x 51.6 x 6.4 cm / 8.7" x 20.3" x 2.5"

Package Weight:

0.9 kg / 2.0 lbs

Compatibility:

High Performance Starlink



8 m
(26 ft)

MESH WIFI ROUTER

Starlink Mesh WiFi Routers wirelessly extend your WiFi network throughout your home to provide a more reliable connection and faster speeds to areas where extra coverage may be needed.

*Requires Starlink App

Package Dimensions:

22.4 x 28.6 x 10 cm / 8.8" x 11.3" x 4"

Package Weight:


1.72 kg / 3.75 lbs

Compatibility:

Standard Starlink

High Performance Starlink

Flat High Performance Starlink

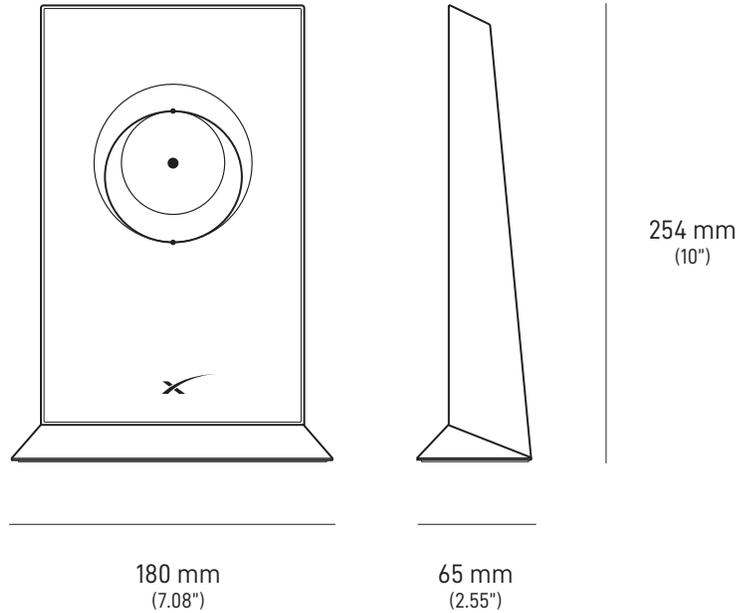

ETHERNET ADAPTER

Designed to connect a device directly to the Starlink Router for a wired connection. Supports up to 1 Gbps speeds.

Package Dimensions:

16.5 x 11.4 x 3.6 cm / 6.5" x 4.5" x 1.5"


Package Weight:

0.15 kg / 0.33 lbs

Compatibility:

Standard Starlink

0.92m
(3 ft)



CABLE ROUTING KIT

Designed for drilling through most walls.

Not recommended for masonry, concrete, or hard coat stucco. Best for customers with prior internet cable routing experience and installation; must be comfortable drilling through walls.

Kit includes a spade bit, drill bit, cable routing tool, silicone sealant, grommets, and wall clips.

Tools Needed:

Drill, Stud / Electrical Finder

Package Dimensions:

34.9 x 13.3 x 4.4 cm / 3.75" x 5.25" x 1.75"

Package Weight:


0.38 kg / 0.83 lbs

Compatibility:

Standard Starlink

High Performance Starlink

Flat High Performance Starlink

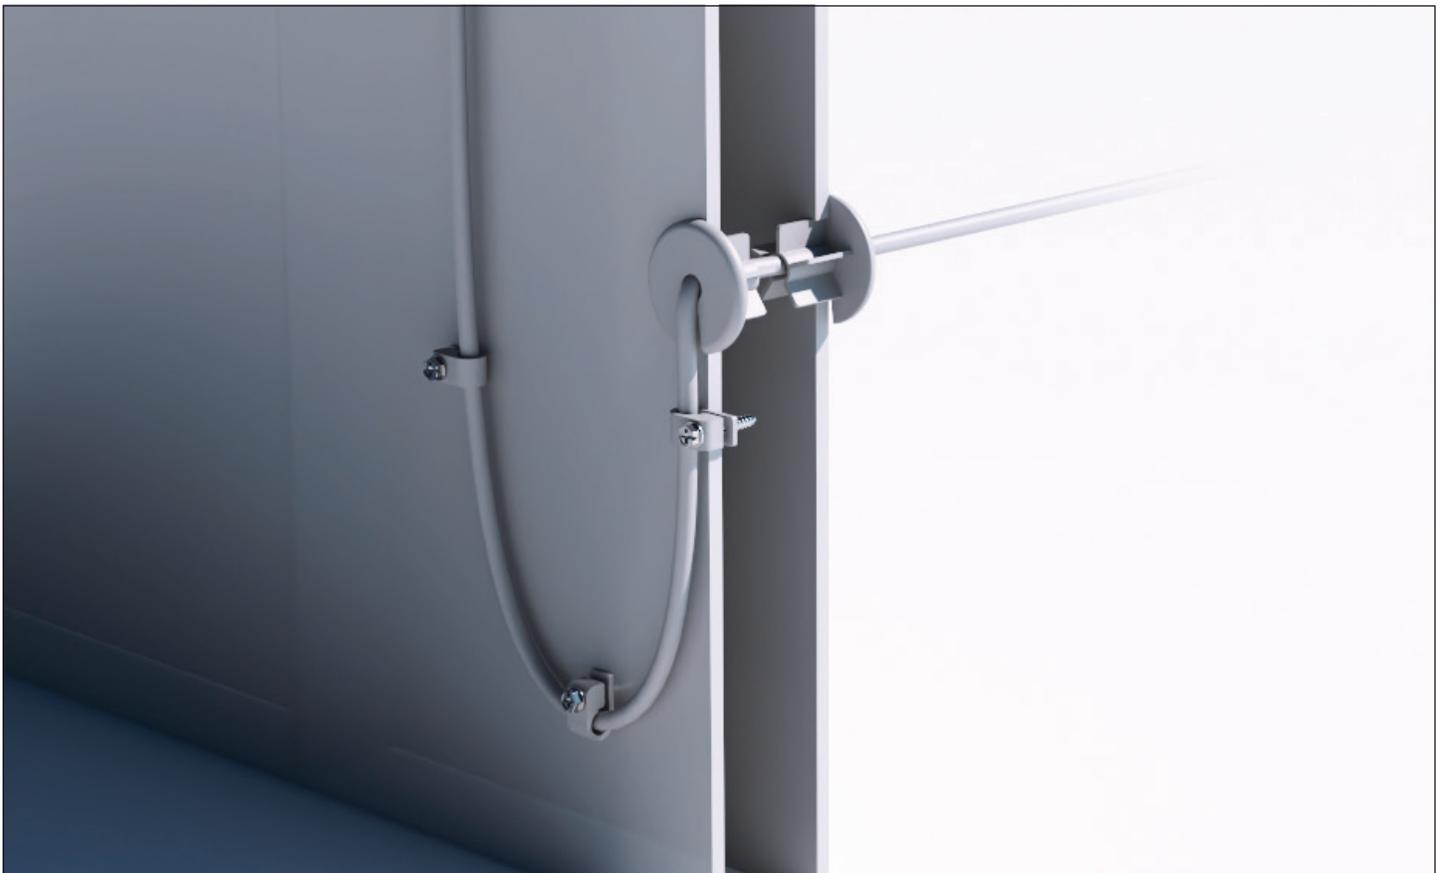

MASONRY ROUTING KIT

Designed for drilling through masonry, concrete or hard coat stucco (excluding EIFS) walls. Best for customers with prior internet cable routing experience and installation; must be comfortable drilling through walls. Kit includes a spade bit, drill bit, cable routing tool, silicone sealant, grommets, and wall clips.

Tools Needed:

Hammer, Hammer Drill, Phillips Head Drill Bit, Stud / Electrical Finder, Goggles, Gloves, and Mask

Package Dimensions:

35.2 x 16.5 x 4.4 cm / 13.875" x 6.5" x 1.75"

Package Weight:

1.0 kg / 2.1 lbs

Compatibility:

Standard Starlink
High Performance Starlink
Flat High Performance Starlink



THANK YOU